

UF Wall & Ceiling Profiles

Aluminum joint covers for internal & external applications

20260618

Product Description

UF Wall & Ceiling Covers IL1 series are a range of extruded aluminum joint covers that are suitable for use in a wide range of internal and external applications in commercial, institutional and industrial buildings. While aesthetically pleasing they are particularly useful for protection of elastomeric joint sealants and fire barriers.

Advantages

- Permanent weather proof barrier
- Protects sealant, filler board and fire barriers
- Aesthetically pleasing
- Easily removable
- Accommodates joint movements
- Available in standard aluminum finish and a wide range of colors (MOQ required)
- Easy to install
- Corner profile available
- Custom profiles available

Color

Natural anodized or mill finish aluminum. Polished finish and powder coated profiles can be provided in a wide range of colors (MOQ required)


Packaging

All the profiles are supplied in standard 3m lengths. Custom lengths can be produced.

Illustrations / Actual Photos




IL1

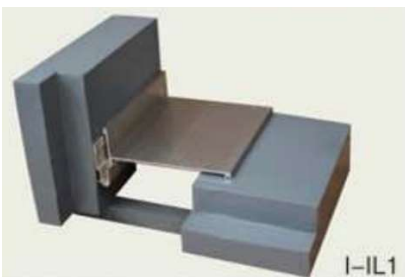


I-IL1 (corner variant)

Standard Profiles

Wall & Ceiling Profiles

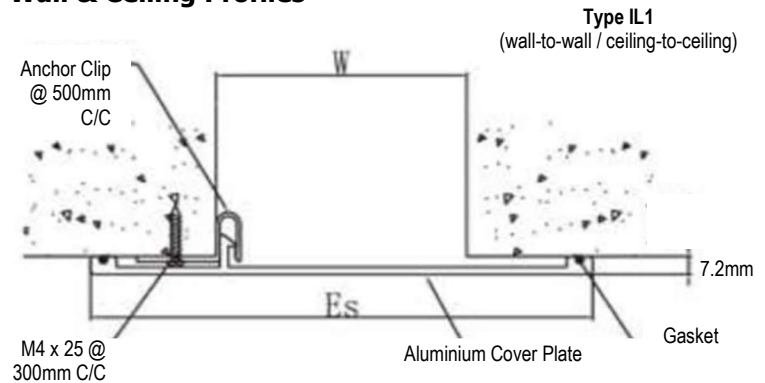

Type	Width (W)	Exposed surface (Es) / Movement	
IL1-50	50mm	150mm	(± 25mm)
IL1-75	75mm	175mm	(± 37mm)
IL1-100	100mm	200mm	(± 50mm)
IL1-125	125mm	225mm	(± 62mm)
IL1-150	150mm	250mm	(± 75mm)

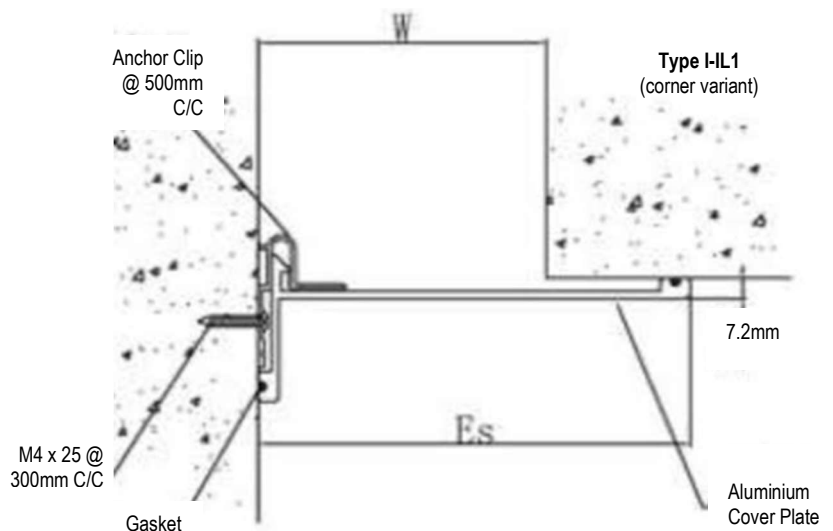

Type	Width (W)	Exposed surface (Es) / Movement	
I-IL1-50	50mm	100mm	(± 12mm)
I-IL1-75	75mm	125mm	(± 18mm)
I-IL1-100	100mm	150mm	(± 25mm)
I-IL1-125	125mm	175mm	(± 31mm)
I-IL1-150	150mm	200mm	(± 38mm)

Installation Guidelines

Provides detailed method statements on all its products for use in various applications. These must be referred to prior to starting work.

Wherever possible install the expansion joint module at the mid-point temperature at which will be the joint will be operated.

It is essential that the joint is installed perfectly level and is well anchored in order to perform correctly.

Health and Safety

This product is for industrial use only by trained operatives. It is not considered hazardous if used correctly.

Authorized Technical Specialist / Applicator

Please note that only Authorized Technical Support Specialists or Applicators are permitted to change any of the information in this data sheet or to provide written recommendations concerning the use of this product.

Datasheet Validity

Makes modifications to its product datasheets on a continuous basis.

Warranties

Supplies products they comply with the properties shown on the current datasheets. In the unlikely event that products supplied are proved not to comply with these properties, then we will replace the non-compliant product or refund the purchase price. Does not warrant or guarantee the installation of the products as it does not have control over the installation or end use of the products. Any suspected defects must be reported in writing within five working days of being detected.

UF Engineering Supply Sdn Bhd

No. 2 Lorong Sentosa, Kawasan Perusahaan Sri Cheeding
42700 Banting, Selangor, Malaysia
Mobile : +60 12 236 9027
Email : ufengineering@gmail.com

